


# FENAFLEX TYRE COUPLINGS



**Aecoflex**

**Engineering Products**


# Aecoflex Tyre Couplings

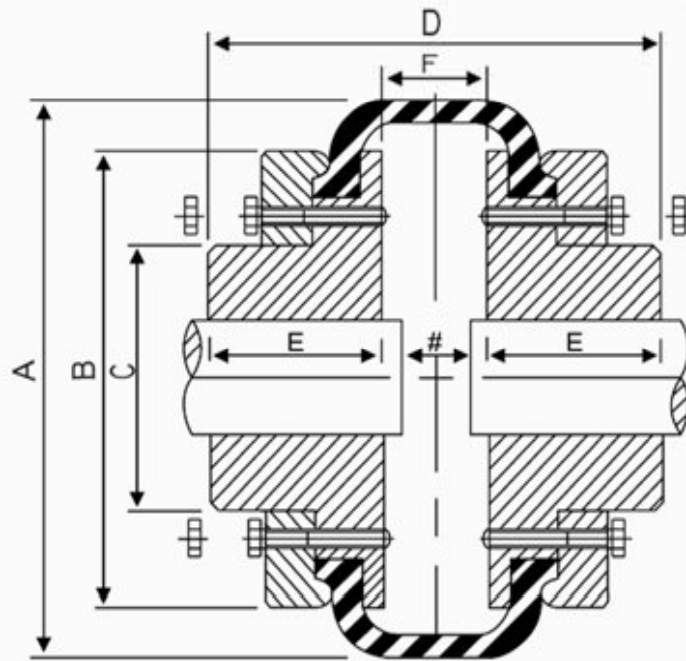

## “ AF ” Type Tyre Couplings

Size	Max Bore	A	B	C	D	E	F	Set Screw on key	No. of screws per flange
AF40	30	104.0	82	-	67	22	23	M5	4
AF45	32	120.0	94	-	73	25	23	M5	4
AF50	38	133.5	100	79	92	32	28	M5	4
AF60	48	165.0	125	73	112	38	36	M6	5
AF70	55	197.0	144	82	132	45	42	M6	5
AF80	65	211.0	167	95	149	51	47	M10	6
AF85	70	222.0	179	103	154	53	48	M12	6
AF90	76	235.0	188	110	164	57	50	M12	6
AF100	85	254.0	216	124	178	60	58	M12	6
AF110	90	279.0	233	134	180	65	50	M12	6
AF120	102	314.0	264	152	207	76	55	M12	6
AF140	120	359.0	313	195	204	89	26	M20	8
AF160	140	402.0	345	216	220	102	16	M20	8
AF180	150	470.0	398	266	258	114	30	M20	10
AF200	150	508.0	429	266	276	114	48	M20	12
AF220	160	562.0	474	267	312	127	56	M20	12
AF250	190	628.0	532	290	360	150	60	M20	12

# Aecoflex Tyre Couplings

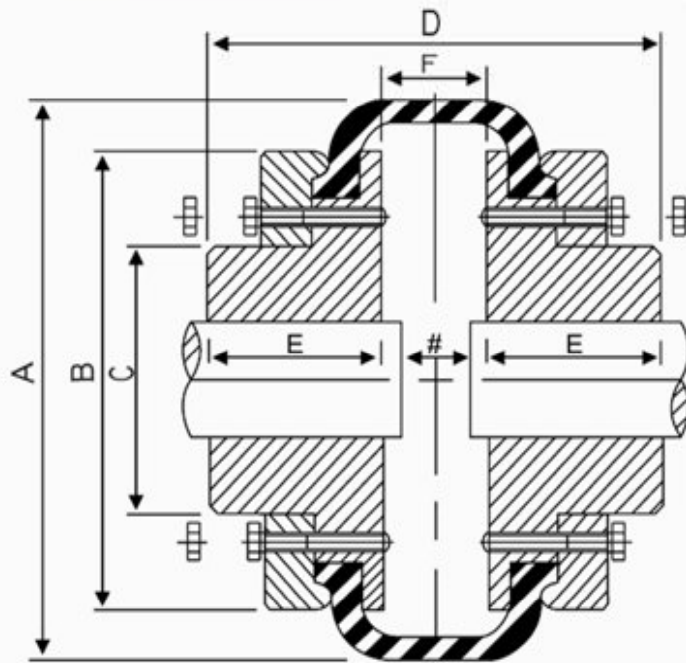

## “ ANUPAM ” Type Tyre Couplings

Size	Max Bore	A	B	C	D	E	F	No. of screws per flange	Set Screw on key
A 1	22	97	82	32	73	26	21	4	M5
A 1.5	25	106	94	43	99	38	23	4	M5
A 2	28	116	100	50	96	38	20	4	M5
A 2.5	29	120	125	51	96	38	20	5	M6
A 3	32	132	144	55	96	38	20	5	M6
A 4	32	133	167	55	99	39	21	6	M10
A 5	38	160	179	65	112	42	28	6	M12
A 7	44	162	188	71	128	49	30	6	M12
A 8	44	163	216	71	133	51	31	6	M12
A 10	45	175	233	65	134	52	30	6	M12
A 12	46	176	264	71	142	53	36	6	M12
A 18	50	203	313	80	145	55	35	8	M20
A 26	56	210	345	90	157	61	36	8	M20
A 36	60	216	398	95	165	61	43	10	M20
A 42	63	246	429	110	172	65	37	12	M20
A 60	85	270	474	120	192	71	40	12	M20
A 82	95	310	532	133	214	71	45	12	M20
A 130	105	350		157	227	91	55		
A 100	100	316		160	202	86	10		
A 200	125	370		237	230	110	10		
A 300	140	415		237	230	110	10		
A 650	171	530		315	282	128	26		